

Fanless 1-litre slim PC with ATI graphics

XS35GS-803 V3L

Slim PC

XS35GS-803 V3L is a fully configured slim PC with 2 GB RAM and 320 GB hard disk, but without operating system. The powerful AMD Radeon™ HD 7410M graphics card makes fluent video playback on full-HD displays a reality. The Atom D2550 processor clocked at 2x 1.86 GHz offers sufficient computing power for a wide range of possible applications and the system barely consumes about 19~27 Watts. This PC comes totally fanless making it perfect to be used in noise-sensitive environments. XS35GS-803 V3L features WLAN and card reader, and sports an array of connectors too which include HDMI, D-Sub (VGA), 5x USB, VGA, Gigabit-LAN and 2x audio ports. It's a slim and stylish PC targeted for daily home or office applications and is capable of playing Full HD 1080p video and 3D contents.

Feature Highlights

Chassis	- Slim 1.5 litre chassis - Dimensions: 25.2 x 16.2 x 3.85 cm - Hole for the Kensington Lock - Optional: VESA75/100 mounting kit PV01
Operating system	- Without operating system - Compatible with Windows 7 (32/64 bit)
CPU	Intel Atom D2550 Dual Core (1.86GHz)
Chipset	Intel NM10 Express Chipset
Graphics	- AMD Radeon HD 7410M, 512MB DDR3 - DirectX 11, Shader Model 5.0
Memory	2 GB DDR3-1333 SO-DIMM memory
Storage	320 GB 2.5" Serial ATA hard disk - SD card reader
Connectors and WLAN	- HDMI v1.4a - D-Sub VGA 5x USB 2.0 (1x front, 4x rear) 2x Audio (mic, head phone) - Gigabit-LAN - WLAN 802.11 b/g/n
Power supply	External 40W fanless power supply
Applications	Basic and Home-Media

Images are only for illustration purposes.



Shuttle order no: PEC-XS35S3L21



Fanless



©2012 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

Shuttle Barebone XS35GS-803 V3L - Product Features



Slim and stylish

Designed as a space-saver, this sleek 1.5 litre nettop PC only measures 3.8cm in width. It maximizes space whether it is placed upright using its stylish stand or affixed to the back of a display with the optional VESA mounting kit (PV01). Due to its small size and flexible design, this practical nettop offers exceptional functionality and is well-suited for home users, small offices, reception areas, classrooms, libraries, showrooms, call centres, public institutions and more.



Fanless and quiet

The Shuttle Barebone XS35GS-803 V3L comes totally fanless making it perfect to be used in noise-sensitive environments such as living rooms, hospitals, libraries etc. As an additional benefit, fanless cases rarely gather dust on the inside and stay cleaner than others. So it's not only quiet and low in energy use, but also dust-free and virtually maintenance free.

The Atom processor integrates the memory controller

Shuttle XS35GS-803 V3L is equipped with Intel's Atom processor D2550 (1.86 GHz, codenamed Cedarview). It comes with both the memory controller and graphics core on-die which helps to keep heat dissipation and memory latency low. The CPU is connected to the Southbridge NM10, codenamed Tiger Point.


Dual Core. Do more.

Shuttle always uses the dual-core variant of Intel's Atom processors and thus integrates the Atom D2550. This boosts the system performance significantly with particular regards to multi-threaded applications.

AMD Radeon HD 7410M graphics

Even with the small size, the Shuttle Barebone XS35GS-803 V3L is equipped with AMD Radeon HD 7410M graphics for a power-packing slim PC that's unmatched in size and performance – and is made for more than just entertainment. Key benefits are:

- Better Performance for 3D rendering and video playback
- Digital 7.1 channel audio output over HDMI
- Supports DirectX 11 and Shader Model 5.0
- Ready to take on games

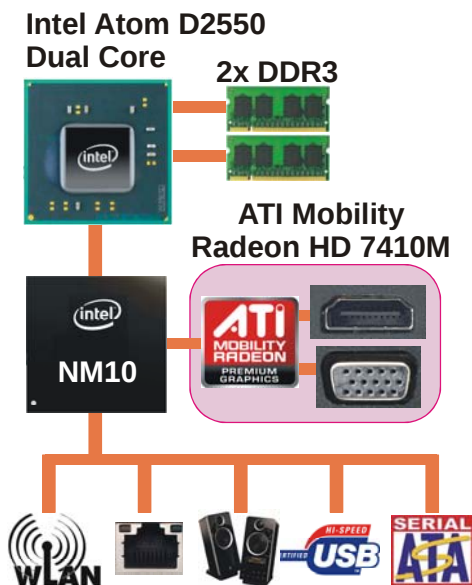



Highly energy-saving

The XS35GS-803 V3L barely consumes, depending on system load, about 19~27 Watts. Running the device 5 days a week for eight hours a day, the annual consumption would amount to less than 40kWh which would mean just 12 Euros on the power bill (20 Euro ct/kWh) - way less than a conventional desktop PC draws.



Two monitor support with HDMI (DVI) and D-Sub/VGA

The integrated graphics supports multiple display support on up to two separate monitors via HDMI (DVI through optional adapter) and D-Sub/VGA. This improves the capabilities and productivity of the user by allowing them to spread multiple windows over two monitors and view them simultaneously.



XS35GS-803 V3L supports Full HD 1080p video

The XS35GS-803 V3L with AMD Radeon HD 7410M graphics offers a plus in performance - experience movies at full-HD 1080p quality. The Shuttle Barebone XS35GS-803 V3L even takes on games. Benefit from an increase in performance when playing and converting videos, editing images and working with different applications at once. With AMD Radeon HD 7410M you get the maximum out of Windows 7.



SD card reader

The built-in SD card reader at the front side makes it easy to transfer files from your camera so you can share videos and photos on your XS35GS-803 V3L with ease.



Kensington Lock

This is a small, metal-reinforced hole as part of an anti-theft system. As known from notebooks, this Mini-PC can also be safely locked by tying it to a solid object.

(The lock-and-cable apparatus is not included.)



Tiny power adapter

The external 40W power adapter is virtually noiseless and can easily be hidden behind the desk thanks to its tiny dimensions.

Dimensions: 89.5 x 37 x 26.5 mm (LWH) = 88ml



Optional VESA mount (Accessory PV01)

Its optional VESA75/100 wallmount allows it to be installed on to walls or just affixed on the rear side of a monitor which is particularly interesting for the industry segment, company buildings and public institutions.



Note on operating position

Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.


Shuttle Barebone XS35GS-803 V3L Specifications

<i>Fanless and silent</i>	Passive cooling, no fan noise at all Perfect to be used in noise-sensitive environments Fanless, dust-free and thus virtually maintenance-free
<i>Chassis</i>	Dimensions without Stand: 25.2 x 16.2 x 3.85 cm (DxHxW) Hole for the Kensington Lock at the back panel Optional accessory: 75mm and 100mm VESA mounting kit (PV01)
<i>Operation System</i>	This system comes without operating system. It is compatible with Windows 7 (32 oder 64 bit)
<i>Processor</i>	Intel Dual Core Atom processor D2550 (Codename: Cedarview) Intel Hyper-Threading technology: 2-threads per core 32 nm manufacturing process, Micro-FCBGA11 package Intel 64 architecture, Core clock: 1.86 GHz, L2 Cache: 1024kB , TDP: max. 10W Supports SSE2, SSE3, SSSE3, Execute Disable Bit Integrated North Bridge with controller for memory and graphics
<i>Cooling</i>	Passive, completely fanless cooling through convective heat transfer Warning: Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.
<i>Chipset</i>	Intel® NM10 Express Chipset (south bridge) Platform Controller Hub (PCH) Code name: Tiger Point
<i>BIOS</i>	AMI BIOS in a 8Mbit Flash ROM supports PnP, ACPI 2.0 Supports external USB flash memory card boot up Supports Power fail resume / AC power on state / always on / always off Supports Wake-on-LAN (WOL) from S3, S3, S5 ACPI states Supports Unified Extensible Firmware Interface (UEFI)
<i>Memory</i>	2 GB DDR3-1333 SO-DIMM memory (at DDR3-1066 speed) Supported maximum capacity: 4 GB
<i>Hard disk</i>	320 GB 2.5" Serial ATA hard disk

Integrated Graphics	AMD Radeon™ HD 7410M graphics processor (Dedicated 3D graphics card) VRAM: 512MB DDR3, 800MHz, 64 bit, 160 Stream Processing Units, 40nm technology Supports DirectX 11, Shader Model 5.0, OpenGL 4.1 Unified Video Decoder (UVD 3) dedicated video playback accelerator Supports full HD decode (1080i/p) Support for up to 2 simultaneous displays: 1) Digital HDMI™ 1.4a, max. resolution: 1920x1200 2) Analog D-Sub VGA, max. resolution: 2048x1536 Supports Extended Desktop Mode and Clone Mode Integrated HD audio controller for 7.1 Surround Sound via HDMI. Supports AC-3, AAC, Dolby TrueHD and DTS Master Audio formats.
Integrated Audio	Integrated Audio IDT92HD81 Audio Codec with Azalia support Two analog audio connectors (3.5mm): 1) Line out (head phone) 2) microphone input Supports digital 7.1 HD audio via the HDMI port.
Card Reader	SD card reader at the front side Supports SDHC, SD, MS und MS-pro memory cards PCIe Interface
Wired Network	RJ45 connector supports Gigabit LAN at 10/100/1000 Mbit/sec. Network controller Realtek RTL8411 Supports Wake-on-LAN (WOL) from S3, S3, S5 ACPI states
Wireless Network	Supports IEEE 802.11b/g/n, max. 150Mbps up-/downstream Security: WPA/WPA2(-PSK), WEP 64/128bit, IEEE 802.11x/i Half size Mini-PCIe-Card
Connectors	HDMI v1.4a digital video and audio output D-Sub/ VGA analog video (15 pin) 5x USB 2.0 (1x front, 4x rear) Gigabit network (LAN, RJ45) Audio Line-out (head phone) Microphone input DC input for the external power adapter
LEDs and buttons	Power button Power LED (white) Hard disk LED (blue)
Power supply	External 40W AC/DC power adapter (fanless), 19V / 2.1A AC Input: 100~240V AC, 50~60Hz, Automatic voltage adjust Dimensions: 89.5 x 37 x 26.5 mm (LWH) DC Connector: 5.5/2.5mm (outer/inner diameter)
Optional accessories	- VESA mount made of metal (PV01) - Adapter for second 2.5" drive instead of optical drive (PHD2)

Environmental spec	Operating temperature range: 0~35°C Relative humidity range: 10~90% (non-condensing)
Certification and Compliance	EMI: CE, FCC, BSMI, C-Tick, CCC Safety: CB, BSMI, ETL Other compliances: RoHS, Eup Lot6 This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU-guidelines: - EMV-guideline 89/336/EWG electromagnetic tolerance - LVD-guideline 73/23/EWG use of electric devices within certain voltage-limits

Shuttle Barebone XS35GS-803 V3L – Connectors

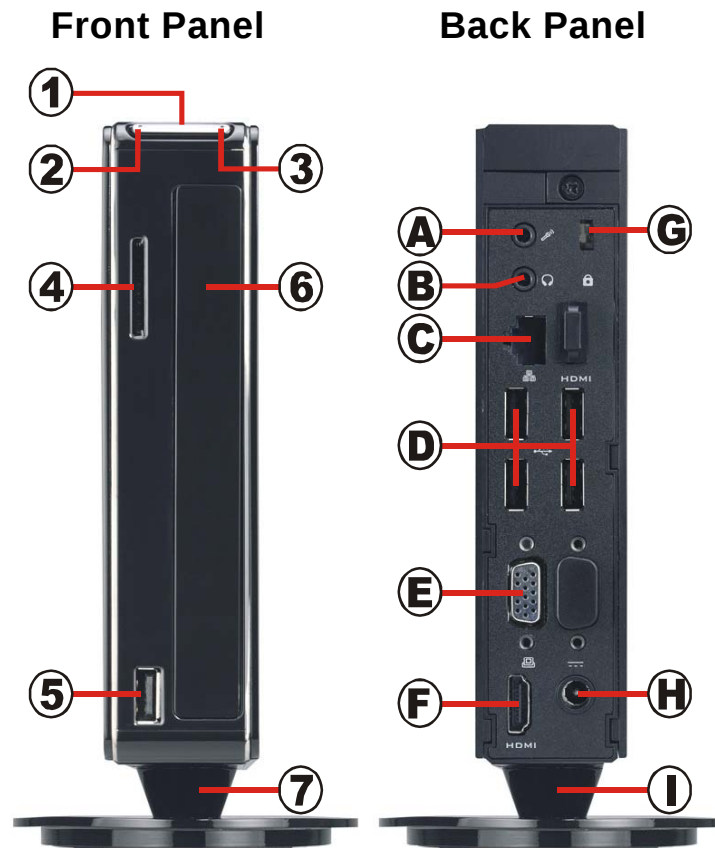

- 1 Power button
- 2 Power LED
- 3 Hard disk LED
- 4 SD card reader
- 5 USB connector
- 6 Bay for the optical slimline drive *)
- 7 Vertical stand

- A Microphone input
- B Head phone output (Line out)
- C Gigabit LAN connector (RJ45)
- D 4x USB connectors
- E D-Sub/VGA connector
- F HDMI connector
- G Hole for the Kensington-Lock
- H Connector for the power adapter
- I Vertical stand



Warning:

Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.

Shuttle XS Series Product Comparison

Comparison: Shuttle Slim-PC XS35V3L Series (Barebone/System)

Model	Type	Graphics	OS	RAM	HDD	DVD	Order no	Barcode
XS35V3L	Barebone	Intel GMA3650	-	-	-	-	PEB-XS35U3L01	811686004288
XS35GSV3L	Barebone	ATI HD 7410M	-	-	-	-	PEB-XS35S3L11	811686004295
XS35-703 V3L	System w/o OS	Intel GMA3650	-	2 GB	320 GB	-	PEC-XS35U3L01	4046047102600
XS35GS-803 V3L	System w/o OS	ATI HD 7410M	-	2 GB	320 GB	-	PEC-XS35S3L21	4046047102648
XS35GS-804 V3L	System w/o OS	ATI HD 7410M	-	2 GB	500 GB	Yes	PEC-XS35S3L11	4046047102655
XS 3501BA V3	System with OS	Intel GMA3650	Win 7 Pro	2 GB	320 GB	-	PET-XS353BA2	4046047102624
XS 3531MA V3	System with OS	ATI HD 7410M	Win 7 HP 32	2 GB	500 GB	Yes	PET-XS353MA1	4046047102662

Comparison: Shuttle Slim-PC Barebone PC XS35/XS36 Series

Model	Graphics	HDMI	DVI	D-Sub	RS232	WOL	ODD [4]	Atom Processor	Memory	LAN
XS35	Intel GMA3150	-	-	Yes	-	-	Yes	D510 (1.66 GHz)	Max. 2GB DDR2-800 [6] 1x SO-DIMM	100
XS35GT	NVIDIA ION2	Yes	-	Yes	-	-	Yes			
XS35V2	Intel GMA3150	-	-	Yes	-	-	Yes	D525 (1.80 GHz)	Max. 4GB DDR3-800 [6] 1x SO-DIMM	Giga
XS35GT V2	NVIDIA ION2	Yes	-	Yes	-	-	Yes			
XS35GTA V2	ATI Mobility Rad. HD 5430	Yes	-	Yes	-	-	Yes			
XS35GS V2	ATI Radeon HD 7410M	Yes	-	Yes	-	-	Yes	Without "L": D2700 (2.13 GHz) "L"-version: [5] D2550 (1.86 GHz)	Max. 4GB DDR3-1066 [6] 2x SO-DIMM	Giga
XS35V3(L)	Intel GMA3650 [2]	Yes	-	Yes	-	Yes [3]	Yes			
XS35GTA V3 [1] XS35GS V3L	ATI Radeon HD 7410M	Yes	-	Yes	-	Yes [3]	Yes			
XS36V(L)	Intel GMA3650 [2]	Yes	Yes	Yes	2x	Yes [3]	-			

[1] XS35GTAV3 is also called XS35GS V3 outside EU.

[2] Intel offers sophisticated graphics driver for the integrated Intel GMA3650 graphics only for Windows 7 32 bit. Linux can be used in standard mode without video and 3D acceleration. (date Oct. 2012)

[3] Supports Wake-on-LAN (WOL), Power fail resume (always on/off) and Resume by RTC Alarm

[4] "ODD" means 5.25" bay for an optical drive in slim-line format

[5] In 2012, Intel phased out the Atom D2700 processor and introduced the D2550 as its successor. This new model comes with a slightly reduced clock rate, while any other features are maintained.

[6] DDR3-1333 is supported at DDR3-1066 or DDR3-800 clock rate, respectively.



Images are only for illustration purposes.