

Only 38 mm thin, HD-ready, fanless, energy saving and configurable

The Shuttle XS 3530M2 is a complete Mini-PC in the 1-litre class with Windows 7 operating system. Intel's Atom D525 Dual Core Processor (2x 1.8 GHz) and the NM10 Express chipset serve as the energy-saving hardware platform. A high-performance AMD Mobility Radeon™ HD 7410M graphics card provides streaming 3D and video playback. Thanks to the HDMI connection there is also excellent sound and picture quality. This Mini-PC can be configured to meet individual requirements. Shuttle offers a 'Pick-up-and-Return' service for 24 months after the date of purchase, as well as a free, Europe-wide hotline.

Feature Highlights

Chassis	<ul style="list-style-type: none"> Slim 1.5 litre chassis Dimensions: 25.2 x 16.2 x 3.84 cm Hole for the Kensington Lock Optional: VESA75/100 mounting kit PV01
Operating system	<ul style="list-style-type: none"> Windows 7 Home Premium or Prof. 64/32 bit version, 6 languages available
CPU	<ul style="list-style-type: none"> Intel ATOM 525 Dual Core (2x 1.8GHz)
Chipset	<ul style="list-style-type: none"> Intel NM10 Express Chipset
Graphics	<ul style="list-style-type: none"> AMD Radeon™ HD 7410M graphics card 512MB DDR3, HDMI and VGA outputs
Memory	<ul style="list-style-type: none"> 2 or 4 GB DDR3 SO-DIMM (204 Pins)
Storage	<ul style="list-style-type: none"> Optional: slim-line DVD or Blu-ray drive Hard disk or SSD, Serial ATA, 2.5" SD card reader
Connectors and WLAN	<ul style="list-style-type: none"> HDMI (Digital Video & Digital Audio) D-Sub VGA 5x USB 2.0 (1x front, 4x rear) Microphone input, Headphones output Gigabit-LAN, WLAN 802.11 b/g/n
Power supply	<ul style="list-style-type: none"> External 40W fanless power supply
Applications	<ul style="list-style-type: none"> Home-Media
Warranty	<ul style="list-style-type: none"> 24 Months Pick-Up-And-Return Service

Images are only for illustration purposes.

Product name: **XS 3530M2**

Order number: **PEK-XS352M01**



XS 3530M2

Slim PC

Built-to-order with Windows 7



©2011 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

Shuttle Barebone XS 3530M2 - Product Features



Slim and stylish

Designed as a space-saver, this sleek 1.5 litre nettop PC only measures 3.8cm in width. It maximizes space whether it is placed upright using its stylish stand or affixed to the back of a display with the optional VESA mounting kit (PV01). Due to its small size and flexible design, this practical nettop offers exceptional functionality and is well-suited for home users, small offices, reception areas, classrooms, libraries, showrooms, call centres, public institutions and more.



Fanless and quiet

The Shuttle Barebone XS 3530M2 comes totally fanless making it perfect to be used in noise-sensitive environments such as living rooms, hospitals, libraries etc. As an additional benefit, fanless cases rarely gather dust on the inside and stay cleaner than others. So it's not only quiet and low in energy use, but also dust-free and virtually maintenance free.

The Atom processor integrates the memory controller

Shuttle XS35GS V2 is equipped with Intel's Atom processor D525 (1.8GHz, codenamed Pineview-D). It comes with both the memory controller and graphics core on-die which helps to keep heat dissipation and memory latency low. The CPU is connected to the Southbridge NM10, codenamed Tiger Point.


Intel Atom D525 Dual Core



DDR3 SO-DIMM



AMD Radeon™ HD 7410M



Dual Core. Do more.

Shuttle always uses the dual-core variant of Intel's Atom processors and thus integrates the Atom D525. This boosts the system performance significantly with particular regards to multi-threaded applications.

AMD Radeon™ HD 7410M graphics card

Even with the small size, the Shuttle Barebone XS35GS V2 is equipped with an AMD Radeon™ HD 7410M graphics card for a power-packing slim PC that's unmatched in size and performance – and is made for more than just entertainment. Key benefits are:

- Digital HDMI output to connect to large displays
- Digital Audio output over HDMI
- Experience video playback at full-HD 1080p resolution
- Ready to take on games
- HDMI and VGA supports dual view (clone or extended mode)

Two monitor support with HDMI (DVI) and VGA

The built in ATI graphics card supports multiple display support on up to two separate monitors via HDMI (DVI through optional adapter) and D-Sub/VGA. This improves the capabilities and productivity of the user by allowing them to spread multiple windows over two monitors and view them simultaneously.





SD card reader

The built-in SD card reader at the front side makes it easy to transfer files from your camera so you can share videos and photos on your XS 3530M2 with ease.



Highly energy-saving

The XS 3530M2 barely consumes, depending on system load, about 20.5~29 Watts. Running the device*) 5 days a week for eight hours a day, the annual consumption would amount to approx. 60kWh which would mean just 12 Euros on the power bill (20 Euro ct/kWh) - way less than a conventional desktop PC draws.

*) Based on a configuration with 2GB of memory, 500GB hard disk, DVD drive and Windows 7



Kensington Lock

This is a small, metal-reinforced hole as part of an anti-theft system. As known from notebooks, this Mini-PC can also be safely locked by tying it to a solid object.

(The lock-and-cable apparatus is not included.)



Tiny power adapter

The external 40W power adapter is virtually noiseless and can easily be hidden behind the desk thanks to its tiny dimensions.

Dimensions: 89.5 x 37 x 26.5 mm (LWH) = 88ml



Optional VESA mount (Accessory PV01)

Its optional VESA75/100 wallmount allows it to be installed on to walls or just affixed on the rear side of a monitor which is particularly interesting for the industry segment, company buildings and public institutions.



Note on operating position

Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.


Shuttle Barebone XS 3530M2 Specifications

<i>Fanless and silent</i>	<p>Passive cooling, no fan noise at all</p> <p>Perfect to be used in noise-sensitive environments</p> <p>Fanless, dust-free and thus virtually maintenance-free</p>
<i>Energy saving</i>	<p>Power consumption: ca. 20.5W (idle mode) and ca. 29W (full load)</p>
<i>Chassis</i>	<p>Dimensions without stand: 25.2 x 16.2 x 3.85 cm (DxHxW) = 1,57 litre</p> <p>Dimensions with stand: 25.2 x 18.5 x 10.04 cm (DxHxW)</p> <p>Weight: 1.8 kg net, 2.5 kg gross</p> <p>Hole for the Kensington Lock at the back panel</p> <p>Optional accessory: 75mm and 100mm VESA mounting kit (PV01)</p> <p>Warning: Please make sure the system is always placed upright using either its stand or the optional VESA mount.</p> <p>Ventilation holes must not be blocked to ensure sufficient cooling.</p>
<i>Operation System</i>	<p>Microsoft Windows 7 Home Premium or Professional</p> <p>64 or 32 bit version</p> <p>6 languages available: German, English, French, Dutch, Italian, Spanish</p>
<i>Processor</i>	<p>Intel Dual-Core Atom processor D525 (Codename: Pineview-D)</p> <p>45nm manufacturing process, FCBGA559</p> <p>Intel Hyper-Threading technology: 2-threads per core</p> <p>Intel 64 architecture, Core clock: 2x 1.8GHz, L2 Cache: 1024kB, TDP: max. 13W</p> <p>Integrated North Bridge with controller for memory and graphics</p>
<i>Cooling</i>	<p>Passive, completely fanless cooling</p>
<i>Chipset</i>	<p>Intel® NM10 Express Chipset Platform Controller Hub (PCH), Code name: Tiger Point</p>
<i>BIOS</i>	<p>AMI BIOS in a 2Mbit Flash ROM supports PnP, ACPI 3.0</p> <p>Supports external USB flash memory card boot up</p>
<i>Memory</i>	<p>2 or 4 GB DDR3 SO-DIMM memory (204 pins)</p>
<i>Hard disk drive</i>	<p>Hard disk drive (5400 rpm) or Solid State Disk (SSD)</p> <p>Serial ATA interface, 6.35cm/2.5" format, 9.5mm height</p>
<i>Optical drive (opt.)</i>	<p>Optional with slim-line DVD±RW super multi or Blu-ray drive</p> <p>Serial ATA interface, 12.7mm height</p>

Discrete Graphics	<p>AMD Radeon™ HD 7410M graphics processor (Codename "Seymore-LP")</p> <p>Dedicated 3D graphics card</p> <p>VRAM: 512MB DDR3, 800MHz, 64 bit (no shared memory)</p> <p>160 Stream Processing Units, 40nm technology</p> <p>Supports DirectX 11, Shader Model 5.0, OpenGL 4.1</p> <p>Unified Video Decoder (UVD 3) dedicated video playback accelerator</p> <p>Supports full HD decode (1080i/p)</p> <p>Support for up to 2 simultaneous displays:</p> <p>1) Digital HDMI™, max. resolution: 1920x1200</p> <p>2) Analog D-Sub VGA, max. resolution: 2048x1536</p> <p>Supports Extended Desktop Mode and Clone Mode</p> <p>Supports Blu-ray play back in combination with an optional slim-line Blu-ray drive and appropriate software</p> <p>Integrated HD audio controller for 7.1 Surround Sound via HDMI.</p> <p>Supports AC-3, AAC, Dolby TrueHD and DTS Master Audio formats.</p>
Integrated Audio	<p>IDT92HD81 Audio Codec with Azalia support</p> <p>Two analog audio connectors (3.5mm):</p> <p>1) Line out (head phone), 2) microphone input</p> <p>Digital Audio via HDMI port</p>
Card Reader	<p>Integrated card reader supports SD, SDHC and SDXC memory flash cards</p>
Wired Network	<p>RJ45 connector supports Gigabit LAN at 10/100/1000 Mbit/sec.</p> <p>Supports Deep Sleep Mode (DSM)</p>
Wireless Network	<p>Supports IEEE 802.11b/g/n</p> <p>Half size Mini-PCIe-Card</p>
Connectors	<p>HDMI v1.3 supports Digital Video and Digital Audio</p> <p>VGA Analog Video (D-Sub 15 pol., analog)</p> <p>5x USB 2.0 (1x front, 4x rear)</p> <p>Gigabit Network (LAN, RJ45)</p> <p>Audio Line-out (head phone)</p> <p>Microphone input</p> <p>DC input for power adapter</p>
LEDs and Buttons	<p>Power button</p> <p>Power LED (white), Hard disk LED (blue)</p>
Power supply	<p>External 40W AC/DC power adapter (fanless)</p> <p>AC Input: 100~240V AC, 50~60Hz</p> <p>Dimensions: 89.5 x 37 x 26.5 mm (LWH)</p>
Certification	<p>EMI: CE, FCC, BSMI, C-Tick; Safety: CB, BSMI, ETL</p> <p>Other compliances: RoHS, Eup Lot6</p>
Environmental Spec	<p>Operating temperature range: 0~35°C</p>

Conformity	<p>This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU-guidelines:</p> <ul style="list-style-type: none">- EMV-guideline 89/336/EWG electromagnetic tolerance- LVD-guideline 73/23/EWG use of electric devices within certain voltage-limits
Warranty	<p>24 Months Pick-Up-And-Return Service</p>

Shuttle Barebone XS 3530M2– Connectors

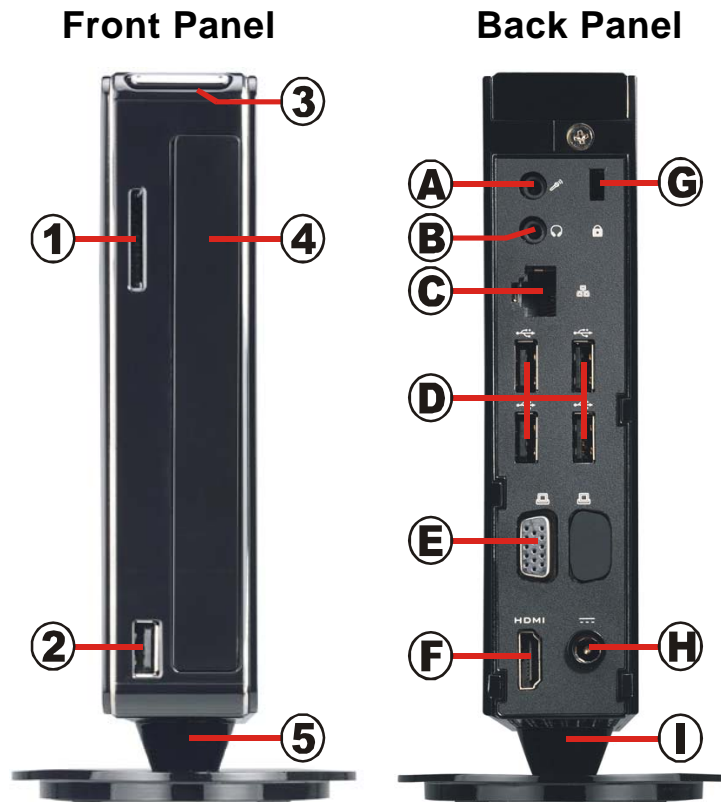

- 1 SD card reader
- 2 USB connector
- 3 Power button with power and hard disk LED
- 4 Bay for optical slim drive *)
- 5 Stand

- A Microphone input
- B Head phone output (line out)
- C Network connector (RJ45)
- D 4x USB connectors
- E VGA connector
- F HDMI connector
- G Hole for the Kensington lock
- H Connector for power adapter
- I Stand

Notes: The right D-sub port will not be functional and be covered with a cap.

*) The optical drive is not included.



Warning:

Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.



Images are only for illustration purposes.