


Entry-level, affordable cube PC

The Shuttle XPC cube Barebone SH110R4 is an entry-level Mini PC with a stylish aluminium chassis and offers several advantages in comparison with its predecessor SH81R4. It supports the 6th and 7th generation of Intel Core desktop processors ("Skylake" and "Kaby Lake"), up to 32 GB memory, 4K displays with 60Hz, high-performance M.2 SSDs with PCIe x4 interface and up to four USB 3.0 devices. SH110R4 can be enhanced by a high-performance graphics card for more demanding applications and the second PCIe-X1-slot can be used for a TV tuner card or I/O extension card for example. WLAN and COM port can be added as an option. The SH110R4 comes with a built-in 80 PLUS Bronze certified power supply and Shuttle's exclusive I.C.E. heatpipe cooling which means it is highly energy-efficient and ready for long-term operation. For a personal look and feel, the front panel can be customised by adding individual designs to it.

Feature Highlights

R4 Chassis	<ul style="list-style-type: none"> Black aluminium chassis (13.3 litre) Bays: 1x 5.25" external, 2x 3.5" internal
CPU	<ul style="list-style-type: none"> Supports LGA 1151 processors (code name: "Skylake" and "Kaby Lake") Supports Intel Core i7/i5/i3, Pentium, Celeron Shuttle I.C.E. Heatpipe cooling system
OS	<ul style="list-style-type: none"> Supports Windows 7, 8.1, 10 and Linux – 64 bit Windows 7/8.1 not supported w/ Kaby Lake CPUs
Chipset	<ul style="list-style-type: none"> Intel H110 PCH chipset
PCI-Express Slots	<ul style="list-style-type: none"> PCIe X16 (v3.0) slot – supports dual-slot graphics cards with 6-pin power connector PCIe X1 (v2.0) slot supports PCIe X4 cards
Graphics	<ul style="list-style-type: none"> Intel HD graphics integrated in the processor DisplayPort supports 2160p/60Hz UltraHD
Memory	<ul style="list-style-type: none"> Supports up to 2x 16 GB DDR4-2133 memory
Drive Connectors	<ul style="list-style-type: none"> 3x Serial ATA 6Gb/s M.2-2280-Slot for M.2-SSDs (SATA / PCIe X4)
Connectors	<ul style="list-style-type: none"> HDMI 1.4, DisplayPort 1.2, VGA/D-Sub GigaBit LAN (Intel 219-LM) 4x USB 3.0, 4x USB 2.0, 1x PS/2 Combo 5.1 ch. HD-audio, mic / head phone ports
Optional Accessories	<ul style="list-style-type: none"> RS232 Serial COM-Port (H-RS232) Wireless LAN 802.11ac + BT module (WLN-M)
PSU	<ul style="list-style-type: none"> 300 Watt mini power supply, 80 PLUS Bronze
Application	<ul style="list-style-type: none"> Entry-level Home/Office, Multimedia

XPC cube Barebone SH110R4

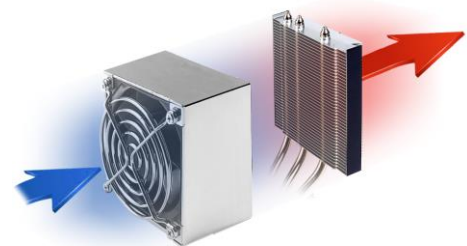


Shuttle I.C.E. Heatpipe cooling

Images for illustration purposes only



Shuttle XPC cube Barebone SH110R4 – Connectors

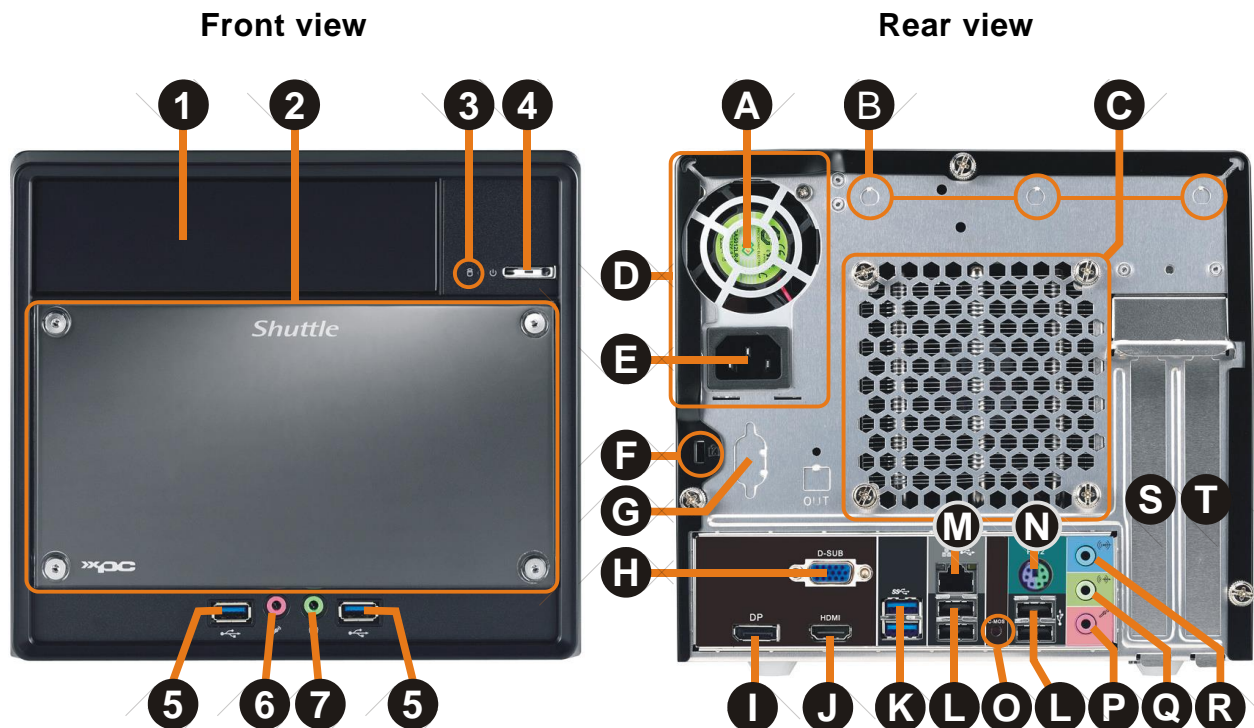


- 1 5.25" optical drive bay
- 2 Removable acrylic plate
- 3 Hard disk LED indicator
- 4 Power switch with LED
- 5 2x USB 3.0 ports
- 6 Microphone input
- 7 Headphone output

- A Power supply fan
- B Optional WLAN antennas
- C Heatpipe cooling system
- D Power supply
- E AC power connector
- F Hole for Kensington Lock
- G Optional COM port
- H VGA/D-Sub video output
- I DisplayPort video output
- J HDMI video output

- K 2x USB 3.0
- L 4x USB 2.0
- M Gigabit LAN (RJ45)
- N PS/2 Combo
- O Clear-CMOS-Button
- P Microphone input
- Q Audio Line-out
- R Audio Line-in
- S PCI-Express X16 slot
- T PCI-Express X1 slot

Shuttle XPC cube Barebone SH110R4 – Mainboard

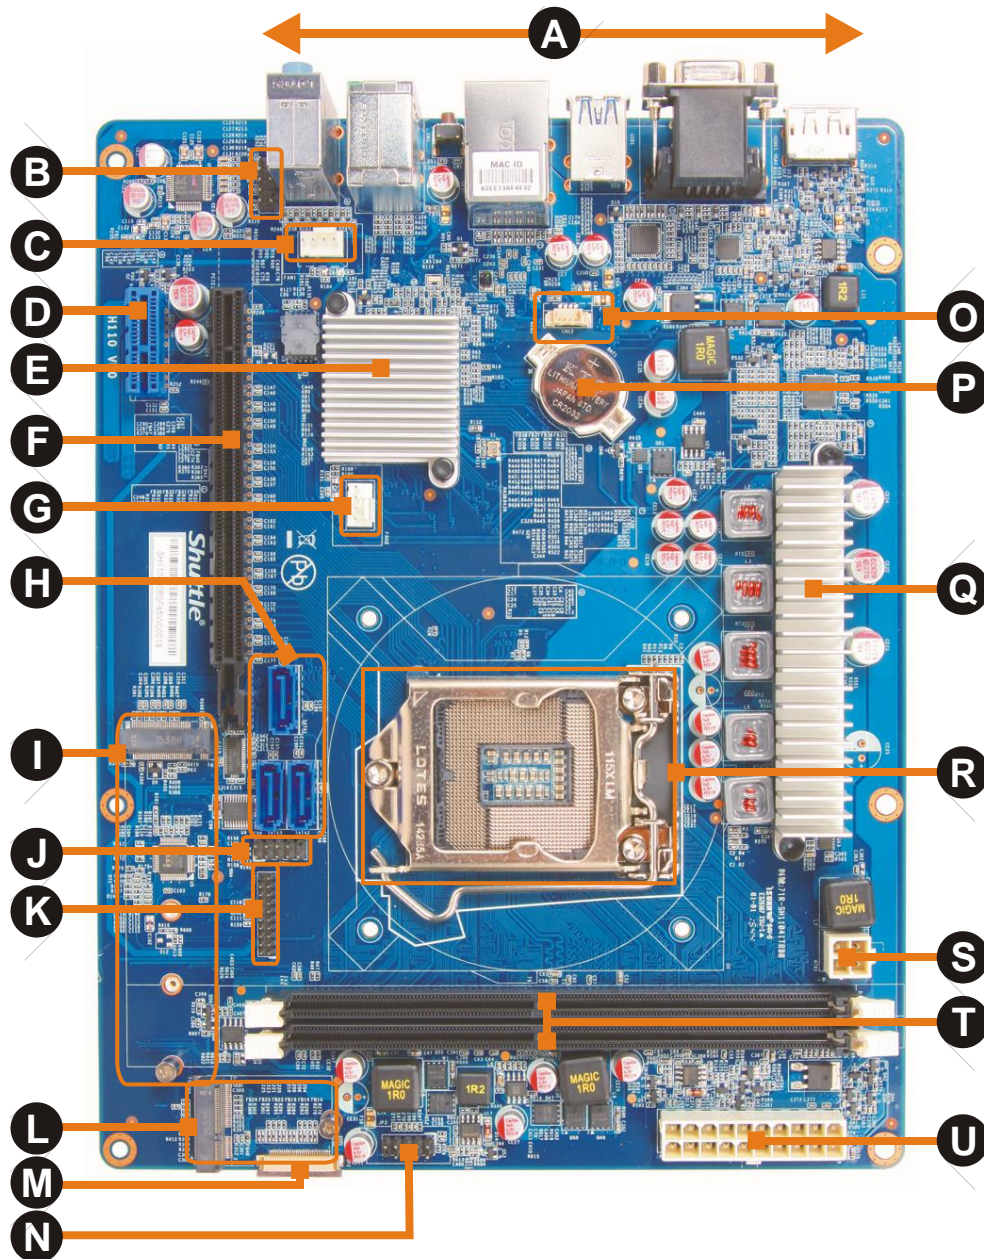

- | | | |
|--------------------------------|-------------------------------------|--------------------------------|
| A Back Panel Connectors | H 3x SATA 6G Connectors | O Onboard USB Connector |
| B Front Audio Header | I M.2-2280 Slot | P CMOS Battery |
| C Fan 1 connector | J Serial Port Header (RS232) | Q CPU Voltage Regulator |
| D PCI-Express X1 Slot | K LPC Port Header | R LGA1151 CPU Socket |
| E Intel H110 Chipset | L M.2-2230 Slot | S ATX Power (4 Pins) |
| F PCE-Express X16 Slot | M Front USB 3.0 Connector | T 2x DDR4 DIMM Sockets |
| G Fan 2 connector | N Front Button/LED Connector | U ATX Power (20 Pins) |

Shuttle XPC cube Barebone SH110R4 – Product Features



The R4 chassis design: a clean and modern look

Shuttle has always placed great emphasis on the interior and exterior aesthetics of the XPC with the belief that a good blend of style and form factor allows the XPC to be attractive, versatile and work well in almost any environment. The construction and cover of the R4 chassis is made of aluminium. This leads to a stylish, but robust appearance which has made the R4 a popular chassis design. The drives and media connectors on the front are easy to access in daily use.



Customisable

The front of this XPC Barebone can easily be customised by simply changing the mylar behind the acrylic front plate. Add your individual design such as a photo, graphics or a company logo to the front panel in just a few steps.



Small, but easy to build

Shuttle XPCs offer the performance of a desktop PC at a third of the size while using standard desktop components. Be ready for the future when banking on Shuttle's R4 chassis. The meticulously designed internal layout features pre-routed cables to reduce clutter, increase airflow and make the installation of components easy.



What does "Barebone" mean?

The Shuttle XPC cube Barebone SH110R4 consists of a stylish case with pre-installed mainboard, power supply unit (PSU) and cables. Despite its small form factor, it offers outstanding connectivity, functionality and performance. For a full PC system, components such as a processor, memory, hard disk and operating system need to be added that can be chosen individually to ideally match personal needs. Some XPC models require a graphics card to be added.




Integrated Cooling Engine (I.C.E.)

In order to ensure proper airflow inside such a small case, more advanced cooling technologies have been developed and implemented in the Shuttle XPC. Shuttle's industry-leading I.C.E. heatpipe technology delivers efficient cooling and is exceptionally quiet.



Supports Intel 14nm Skylake and Kaby Lake Processors

Skylake is the codename for Intel's 6th and 7th Generation of Intel Core Processors introduced in 2015 along with the 100-Series chipsets. The Shuttle XPC cube Barebone SH110R4 supports the desktop version with socket LGA1151, while the previous generation (code name "Haswell", LGA1150) is not compatible.

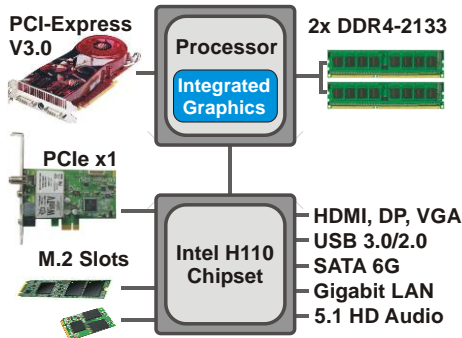

Single-Chip Chipset: Intel H110

The Shuttle XPC cube Barebone SH110R4 sports Intel's H110 Platform Controller Hub (PCH) which is part of the 100 Series "Sunrise Point" chipset. The H110 chipset consists of a single chip and integrates the hard drive controller, network controller, firmware interface, PCIe links, USB and other connectors.



Internal Drives

Up to one optical drive and two hard disks can be fitted in the Shuttle XPC cube Barebone SH110R4. To reduce heat and improve on airflow, the drive rack built into the SH110R4 leaves generous space between the hard disks. Intelligently-engineered airflow mechanics channels cool air to where it is needed most - protecting components and providing optimal performance.



Supports up to 32 GB DDR4 memory

The Shuttle XPC cube Barebone SH110R4 supports up to 32 GB of DDR4-2133 memory which is ideal for workstations powered by 64-bit operating systems, so users take full advantage of high-performance configurations. Compatible memory comes in 288-pin DIMM modules at 1.2V operating voltage, while the predecessor is 240-pin at 1.5V operating voltage. For DDR3L it is 1.35V.



M.2-2280-Slot for SSD cards

The M.2-2280 BM slot supports M.2 SSD storage cards with SATA or with the more advanced PCIe interface. Type 2280 means, it supports the usual M.2 cards with a width of 22mm and a length of 80mm, but also 2242 and 2260 standard cards are supported.



M.2-2230-Slot for optional WLAN


The M.2-2230 AE slot is intended for Wireless LAN (Wifi), Bluetooth, GSM/UMTS cards and other.

Shuttle offers the optional accessory „WLN-M“ (see picture on the left), which adds WLAN 802.11ac and Bluetooth 4.0 to your Shuttle XPC cube Barebone SH110R4.



4x USB 3.0 and 4x USB 2.0

The Shuttle XPC cube Barebone SH110R4 sports two USB 3.0 ports on both front and rear, besides four USB 2.0 ports on rear. USB 3.0 achieves a maximum data rate of up to 5.0Gbps (640MBytes/sec) which is ten times faster than USB 2.0. USB 3.0 is fully compatible to USB 2.0. USB 2.0 can provide a maximum output of 500mA to the USB device while USB 3.0 can provide a maximum output of 900mA which is particularly important for portable hard drives.

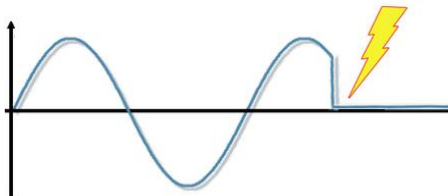


Power on after Power fail

The BIOS setup provides a "Power-On after Power Fail" function that can be found under "Power Management Configuration". As the name indicates, this function determines the PC's behaviour after power failure: (1) unconditional power on, (2) restore former status or (3) keep system turned off.




80 PLUS BRONZE certified 300W Power Supply

The Shuttle XPC cube Barebone SH110R4 is equipped with a rock-stable built-in 300W power supply which works excellent with the latest graphics cards and Core i3/i5/i7 processors. Its 80 PLUS Bronze logo indicates that it provides more than 82/85/82% of energy efficiency at 20/50/100% of rated load. This means a reduction of energy consumption while it increases the computer's reliability. In addition, the power supply uses a 50mm cooling fan delivering the same airflow, but spins at a slower speed than previous 40mm models to make the system run even more quietly.

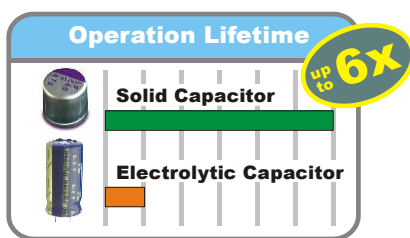

Solid Capacitors

By using all-solid capacitors (audio excepted) Shuttle mainboards are long-life and provide industry-leading stability and reliability. The average lifespan of one solid capacitor is more than six times longer compared to the previous generation of electrolytic capacitors.

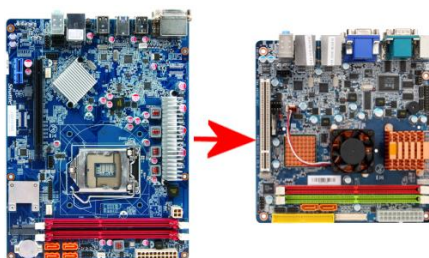


Mini-ITX Mainboard Support

Shuttle expands the capabilities of its R chassis adding support for Mini-ITX mainboards (17 x 17cm or 6.7 x 6.7 inches) which means the mainboard can easily be up- or downgraded without any modifications to the chassis.

Graphics Features



4K 2160p
ULTRA HD
 3840 x 2160



Built-in Intel® HD Graphics Engine

The integrated Intel® HD Graphics depends on the type of processor used and supports hardware decoding for HEVC (4K/H.265) video, Intel® Quick-Sync video encoding, 2160p high-definition resolution, HDCP, Blu-ray*) playback, DirectX 12 and up to 1760MB shared graphics memory. The graphics performance is comparable to entry-level discrete graphics cards.

*) appropriate software and optical drive required

Supports 4K Ultra-HD video playback

4K resolution is the next technological milestone in high-definition content delivery, utilizing more than four times of 1080p Full HD pixel density. The Shuttle XPC cube Barebone SH110R4 supports 4K Ultra-HD video content at 2160p/60Hz via its DisplayPort video output in conjunction with Intel Core™ i3/i5/i7 processors.

Video outputs

The PC features three video outputs:

- HDMI v1.4 (supports 1080p/60 and 2160p/30)
- DisplayPort v1.2 (support 1080p/60 and 2160p/60)
- VGA / 15-pin D-Sub (supports analog video)

Supports two independent displays simultaneously.

Dual View Technology

Dual View technology offers multiple display support for up to two separate monitors. This helps improve on productivity by allowing to spread multiple windows across two monitors while working with them simultaneously. For this, the Shuttle XPC cube Barebone SH110R4 features two digital video outputs (DisplayPort and HDMI) and an analog VGA port.

Support of up to four displays

The Shuttle XPC cube Barebone SH110R4 can be connected to up to four displays, if a dedicated discrete PCI-Express graphics card is used. This function is based on the "Switchable Graphics" feature.

PCI-Express V3.0 for high-performance graphics cards

Thanks to the optimised internal layout, the XPC cube Barebone SH110R4 even takes large dual-slot graphics cards. The modern PCI Express V3.0 interface makes sure there is no bottleneck when gaming or working with 3D applications. This barebone PC also features an additional 6pin ATX auxiliary power connector for top-of-the-range graphics cards.

Optional Accessories



WLAN-Kit (WLN-M)

Shuttle offers the optional accessory „WLN-M“, which adds WLAN 802.11ac and Bluetooth 4.0 to your Shuttle XPC cube Barebone SH110R4.



Serial RS-232 port (H-RS232)

One serial COM port (RS232) can optionally be installed to the back panel. This is particularly relevant for professional applications such as electronic POS, industrial automation systems and scientific analysis.



500W Power Supply with 80 PLUS Silver Logo (PC63J)

The PC63J is a high-end power supply with a maximum output wattage of 500W. It features additional 6-pin and 8-pin ATX auxiliary power connectors for high-end graphics cards. Thanks to its 80 PLUS Silver certification for power-efficient devices, this power supply is also suitable for ENERGY STAR® compliant systems.



Adapter for 2.5" drives (PHD3)

The PHD3 allows for installation of 63.5mm (2.5") hard drives or SSDs into a larger 89 mm (3.5") drive bay.

Shuttle XPC cube Barebone SH110R4 - Specifications

<i>R4-Chassis</i>	<p>Black aluminium chassis with acrylic front plate</p> <p>Customisable front panel design: simply change the mylar and add a personal design such as a photo, graphics or a logo to the front panel.</p> <p>Storage bays: 1 x 5.25" (external), 2 x 3.5" (internal)</p> <p>Dimensions: 32.5 x 21.5 x 19.8 cm (LWH) = 13.8 liters (without rubber feet)</p> <p>Weight: 3.4 kg net / 4.5 kg gross</p>
<i>Mainboard and Chipset</i>	<p>Shuttle mainboard FH110, Shuttle form factor, proprietary design for XPC SH110R4</p> <p>Chipset/Southbridge: Intel® H110 (code name: Lynx Point)</p> <p>Platform Controller Hub (PCH) Intel® GL82H110</p> <p>Passive chipset cooling with heat sink</p> <p>The Northbridge is integrated into the processor.</p> <p>Solid Capacitors for sensitive areas provide excellent heat resistance for enhanced system durability</p>
<i>BIOS</i>	<p>AMI BIOS, SPI Interface, 32MBit Flash-ROM</p> <p>Supports PnP, ACPI 3.0, Hardware Monitoring</p> <p>Supports boot up from external USB flash memory</p> <p>Supports Unified Extensible Firmware Interface (UEFI) [2]</p>
<i>Power Supply</i>	<p>Built-in 300 Watt mini switching power supply (model PC61J)</p> <p>AC input voltage: 100~240V, 50~60 Hz</p> <p>80 PLUS Bronze compliant: The PSU provides at least 82/85/82% of efficiency at 20/50/100% of load.</p> <p>Active PFC circuit (Power Factor Correction)</p> <p>ATX main power connectors: 2x10 and 2x2-pin</p> <p>Graphics power connector: 6-pin</p> <p>Other connectors: 4x SATA, 2x Molex, 1x Floppy</p>
<i>Operation System</i>	<p>This system comes without operating system.</p> <p>It is compatible with Windows 10 / 8.1 / 7 and Linux.- 64 bit.</p> <p>Note: Windows 7 and 8.1 is only supported in combination with the 6th generation Intel Core processors "Skylake".</p> <p>Additional note on Windows 7 see [8]</p>

Processor Support	<p>Socket LGA 1151 (H4) supports</p> <p>Intel Core i7 / i5 / i3, Pentium and Celeron processors</p> <ul style="list-style-type: none"> - 6th generation, code name "Skylake" - 7th generation, code name "Kaby Lake" [9] <p>Maximum supported processor power consumption (TDP) = 95W</p> <p>14nm process technology, up to 8 MB of L3 cache</p> <p>Not compatible with Intel Xeon E3 V5 processors for socket LGA1151 and processors with the older Socket LGA 1150.</p> <p>Does not support the unlock-function of Intel K-Series processors.</p> <p>The processor integrates PCI-Express, memory controller and the graphics engine on the same die (performance features depending on processor type)</p> <p>Please refer to the support list for detailed processor support information at global.shuttle.com.</p>
Heatpipe Processor Cooling	<p>Shuttle I.C.E. (Integrated Cooling Engine)</p> <p>advanced I.C.E. heatpipe technology, linear-controlled 92mm fan</p> <p>SilentX cooling and noise reduction technology with Active Airflow</p>
Memory Support	<p>2 x 288-pin slots</p> <p>Supports DDR4-2133 memory (PC4-17066) at 1.2V [2]</p> <p>Supports Dual Channel mode</p> <p>Supports max. 16 GB per DIMM, maximum total size of 32 GB</p>
PCe Slots	<p>1x PCI-Express x16 v3.0 slot (PEG, for graphics cards only)</p> <p>1x PCI-Express x1 v2.0 slot, open-ended [3]</p> <p>Supports dual-slot (double-width) graphics cards (occupies the second PCI-Express slot)</p> <p>With 6-pin power connector for the graphics card.</p>
Two M.2-Slots	<p>This XPC features two M.2 expansion slots:</p> <p><u>(1) M.2 2280 BM slot</u></p> <ul style="list-style-type: none"> - Interfaces: PCI-Express Gen. 2.0 X4 (max. 16 Gbit/s) and SATA v3.0 (max. 6 Gbit/s) - supports M.2 cards with a width of 22 mm and a length of 42, 60 or 80 mm (type 2242, 2260, 2280) - supports SATA SSDs (BM-Key) or PCIe SSDs (M-Key) <p><u>(2) M.2 2230 AE slot</u></p> <ul style="list-style-type: none"> - Interfaces: PCI-Express Gen. 2.0 X1 und USB 2.0 - supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230) - supports M.2-WLAN cards (accessory WLN-M [4])

Integrated Graphics (optional)	<p>The features of the integrated Intel HD graphics function depend on the processor type used.</p> <p>Supports DirectX 12, OGL 5.x, OCL 2.x</p> <p>The PC features three video outputs:</p> <ul style="list-style-type: none"> - HDMI v1.4 (supports 1080p/60 and 2160p/30) - DisplayPort v1.2 (support 1080p/60 and 2160p/60) - VGA / 15-pin D-Sub (supports analog video) <p>Supports displays with 4K Ultra HD resolution at 3840 x 2160</p> <p>Supports two independent displays with the integrated graphics function</p> <p>Supports more displays in combination with a discrete graphics card [6]</p> <p>Supports Blu-ray (BD) playback with HDCP content protection [7]</p> <p>DisplayPort and HDMI support multi-channel digital audio over the same cable</p> <p>Maximum shared memory of 1760 MB</p>
6-Channel Audio	<p>Audio Codec: Realtek ALC662, 5.1 channel</p> <p>Three analog audio connectors (3.5mm) at the back panel:</p> <p>Line-in (blue), line-out (green) and microphone input (pink)</p> <p>shared with 5.1 channel line-out (front, rear, center/bass)</p> <p>Front panel: microphone input and head phone output (line-out)</p>
Gigabit-LAN Controller	<p>Intel i219LM PHY connected to the MAC of the processor</p> <p>Supports 10 / 100 / 1.000 MBit/s operation</p> <p>Supports WAKE ON LAN (WOL)</p> <p>Supports network boot by Preboot eXecution Environment (PXE)</p>
Drive Connectors	<p>3x Serial ATA 6G (rev. 3.0, max. 6 Gbit/s, colour: blue)</p>
Front Panel Connectors	<p>Microphone input (3.5 mm)</p> <p>Headphone output (3.5 mm)</p> <p>2x USB 3.0</p> <p>Power button</p> <p>Power indicator (Blue LED)</p> <p>Hard disk drive indicator (Yellow LED)</p>
Back Panel Connectors	<p>HDMI 1.4 (digital video and audio)</p> <p>DisplayPort 1.2 (digital video and audio)</p> <p>D-Sub VGA (analog video)</p> <p>2x USB 3.0, 4x USB 2.0</p> <p>GigaBit LAN (RJ45)</p> <p>Audio Line-out (3.5 mm), Audio Line-in (3.5 mm), Microphone Input (3.5 mm)</p> <p>PS/2 Combo - supports keyboard or mouse</p> <p>Clear CMOS button</p> <p>Optional: Serial RS232 port (Accessory: "H-RS232")</p> <p>Perforations for optional WLAN antennas [4]</p>
Other Connectors (onboard)	<p>Front-Panel-Anschlüsse: USB, Audio, Buttons, LEDs</p> <p>1x RS232, serielle Schnittstelle (4 Pins)</p> <p>2x Lüfter-Anschlüsse (4 Pins)</p>

<i>Included Accessories</i>	Multi-language XPC Installation Guide (EN, DE, FR, ES, JP, KR, SC, TC) 32/64-bit driver disk 2x Serial ATA cables AC Power Cord (with protective-earth contacts) Heatsink Compound, Bag with screws Protector cap for the CPU socket (do not use if heat-pipe or fan is mounted)
<i>Optional Accessories</i>	Back panel adapter for serial RS232 port (H-RS232) Wireless LAN 802.11n kit with two antennas (WLN-M) [4] Adapter for 2.5" drives such as SSDs (PHD3) 500W power supply, 80Plus Silver (PC63J)
<i>Environmental criteria</i>	Operating temperature: 0~40°C Humidity: 10~90%
<i>Certifications Compliance</i>	EMI: FCC, CE, BSMI, C-Tick Safety: ETL, CB, BSMI Other: RoHS, Energy Star 5.0, ErP This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives: (1) 2004/108/EC relating to electromagnetic compatibility (EMC), (2) 2006/95/EC relating to Electrical Equipment designed for use within certain voltage limits (LVD), (3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP)

[1] Overclocking Notice

Please note there is a certain risk involved with overclocking, including adjusting the BIOS settings or using third-party overclocking tools. Overclocking may affect your system stability or even cause damage of the components and devices of your system. It is done at your own risk and expense. Shuttle cannot be held responsible for possible damage caused by overclocking.

[2] Memory Support - the mainboard supports DDR4-2133 memory modules with 1066MHz I/O clock and 267MHz memory clock. You can also use higher rated modules (e.g. DDR4-2400), however, they will also be operated like DDR4-2133 modules.

[3] Open-ended PCI-E slot - The X1 slot uses an open-ended socket to permit physically longer cards (e.g. X4 or X8) while the speed is limited to X1.

[4] Optional Wireless LAN module (WLN-M): This XPC Barebone supports the optional Shuttle XPC Accessory WLN-M which consists of a M.2-2230 card with IEEE 802.11ac and BT4.0 functionality and two external antennas with appropriate antenna cables.

[5] How to convert DisplayPort to HDMI/DVI

The DisplayPort output can be converted to HDMI or DVI by an additional, passive adapter cable. For example:

DELOCK 82590: 1m, DisplayPort (male, 20p) to HDMI-A (male, 19p)

DELOCK 82435: 5m, DisplayPort (male, 20p) to DVI-D (male, 24p)

The integrated graphics automatically detects the connected display and puts out the appropriate electric signal - either DisplayPort (without an adapter) or HDMI/DVI (with an adapter).

However, a monitor with a DisplayPort connector cannot be connected to the HDMI port with a simple, passive adapter.

[6] Supports additional displays in combination with a discrete graphics card

The integrated graphics function already supports two independent displays via its digital video outputs. This PC can even support more displays in combination with a discrete PCI-Express graphics card. This function is based on the Switchable Graphics feature introduced with the 2nd Generation of Intel® Core™ processors. To enable this, please enter the BIOS Setup Utility by pressing the "Delete" key after powering on the PC, then go to the "Advanced" tab and change the "Initiate Graphics Adapter" setting to "Switchable".

[7] For Blu-ray playback appropriate software and a Blu-ray drive is required (not included).

[8] Why may the PS/2 port help install Windows 7?

The Intel® 100 chipset series has done away with support for the Enhanced Host Controller Interface (EHCI) which is the driver software for the USB 2.0 ports. The new chipset only supports the updated Extensible Host Controller Interface (xHCI for USB 3.0) which is not supported by the original Windows 7 installation disk. This means, that peripheral devices connected by USB (like keyboard, mouse and external optical drive) will not work during Windows 7 Installation. There are two solutions: (1) use a PS/2 keyboard or a PS/2 mouse and install Windows 7 from an internal DVD drive or (2) add the required USB 3.0 drivers to the Windows 7 installation files - this procedure is explained in the Shuttle FAQ section at global.shuttle.com.


[9] Kaby Lake processor support

The 7th generation Intel Core processors "Kaby Lake" are supported from BIOS version SH110000.200. Download website: <http://global.shuttle.com/support/download>

Note: If a Kaby Lake processor is used, this XPC will only support Windows 10 and Linux operating systems. Windows 7 and 8.1 will no longer be supported.

Shuttle XPC cube Barebone SH110R4 – Mylar Dimensions

The R4 front panel comes with a removable acrylic plate which allows for creating individual front designs. Simply change the mylar and add your individual design such as a photo, graphics or a company logo to the front panel in just a few steps.

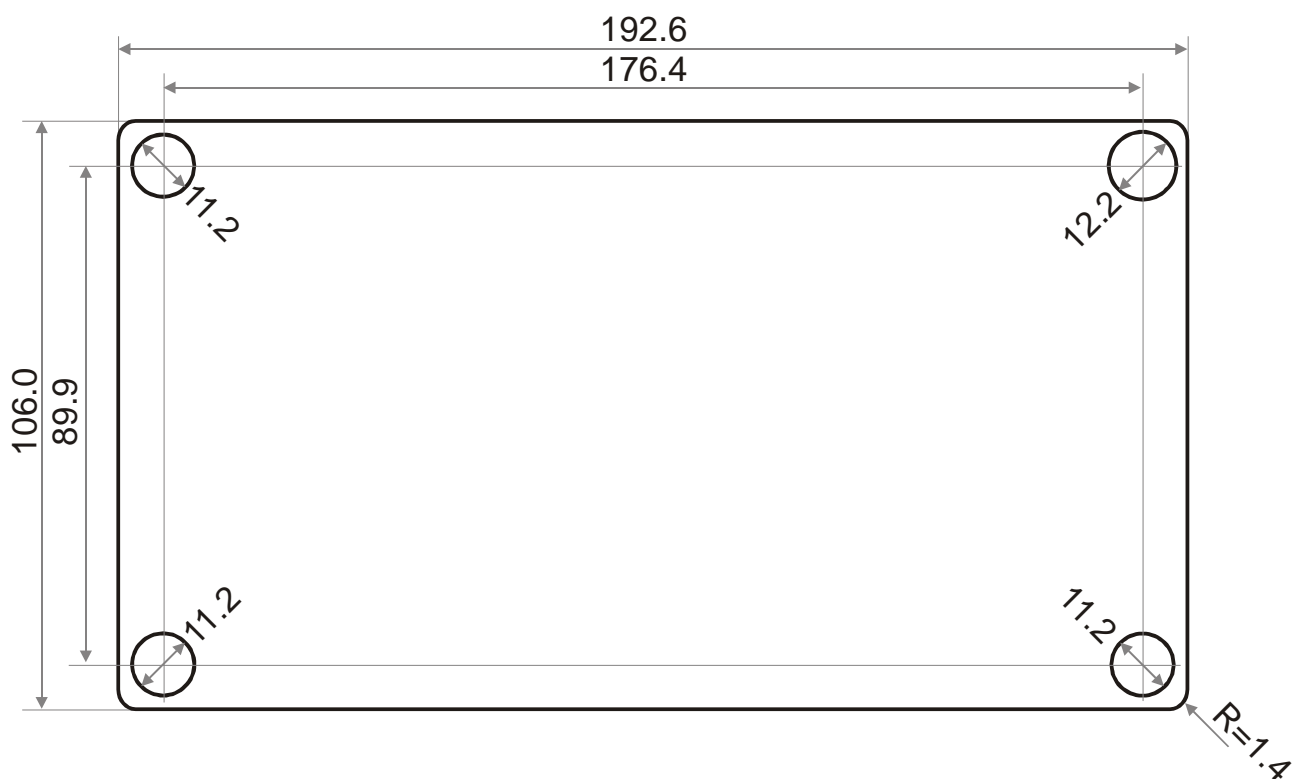



All dimensions in millimeter (mm)



Example

SH81R4 versus SH110R4







Comparison with the predecessor

Barebone Model	SH81R4	SH110R4
Back Panel		
Intel Processor Support	LGA1150, max. 95W 22nm Haswell (4 th Gen. Core CPU) Intel Core i7, i5, i3, Pentium, Celeron	LGA1151, max. 95W 14nm Skylake (6 th Gen. Core CPU) 14nm Kaby Lake (7 th Gen. Core CPU) Intel Core i7, i5, i3, Pentium, Celeron
Operation System	Windows 7, 8.1, 10 and Linux 64 bit	Windows 7, 8.1, 10 and Linux 64 bit Windows 7+8.1 only with Skylake CPUs
Chipset	Intel H81	Intel H110
Memory	Max. 2x 8 GB DDR3-1600	Max. 2x 16 GB DDR4-2133
PCI-Express Slots	(1x) PCIe X16 v3.0 (1x) PCIe X1 v2.0	(1x) PCIe X16 v3.0 (1x) PCIe X1 v2.0
Mini-Slots	1x Mini-PCIe Full Size (mSATA) 1x Mini-PCIe Half Size	1x M.2-2280BM (PCIe X4, SATA) 1x M.2-2230AE (PCIe X1, USB 2.0)
Front Panel	Power Button with LED, HDD LED Microphone-in, Head phone out 2x USB 2.0	Power Button with LED, HDD LED Microphone-in, Head phone out 2x USB 3.0
Back Panel	HDMI, DVI-I 6x USB 2.0, 2x USB 3.0 GigaBit LAN (Realtek 8111E) 3x Audio, Clear CMOS Button	HDMI, DisplayPort, D-Sub/VGA 4x USB 2.0, 2x USB 3.0, PS/2 Combo GigaBit LAN (Intel i219-LM) 3x Audio, Clear CMOS Button
UltraHD Support	HDMI: 2160p/30Hz	HDMI: 2160p/30Hz DisplayPort: 2160p/60Hz
SATA onboard *)	2x SATA 6G 1x SATA 3G	3x SATA 6G
Power Supply	300W 80 PLUS Bronze	300W 80 PLUS Bronze
Optional Accessories	500W PSU (PC63J) RS232 port (H-RS232) WLAN kit 802.11n (WLN-C) 2.5" drive kit (PHD3)	500W PSU (PC63J) RS232 port (H-RS232) WLAN kit 802.11n/ac+BT (WLN-M) 2.5" drive kit (PHD3)

*) Note: The H81 and H110 chipsets both support four SATA devices in total.

three are used for the onboard SATA connectors for regular SATA drives and one for the mSATA slot (SH81R4) or for the M.2-2280-slot (SH110R4), respectively.

Comparison: Shuttle XPC cube products with socket LGA 1151

Shuttle XPC cube Barebone	SH110R4	SH170R6 SH170R6 Plus	SZ170R8	SZ170R8V2
Chipset	Intel H110	Intel H170	Intel Z170	Intel Z170
CPU Support	Socket LGA1151, TDP max. 95W, code name "Skylake" and „Kaby Lake“			
Operating System	Supports Windows 7, 8.1, 10 and Linux 64 bit (Windows 7, 8.1 with Skylake CPU only)			
K serie CPU Overclocking?	No	No	Yes	
CPU Cooling	Heat-pipe 3 pipes		Heat-pipe 4 pipes	
Storage Bays	1x 5.25" 2x 3.5" (internal)	1x 5.25" 1x 3.5" (external) 1x .25" (internal)	4x 3.5" (internal)	
Max. Memory	2x 16 GB DDR4-2133	4x 16 GB DDR4-2133		
Video Outputs	HDMI, DisplayPorts, VGA Dual Display	HDMI, 2x DisplayPorts Triple Display		
4K-Support (Ultra HD)	HDMI: 2160p/30 Hz DP: 2160p/60 Hz	HDMI: 2160p/30 Hz DP: 2160p/60 Hz		
PCI Express Slots	1x PCIe X16 V3 1x PCIe X1 V2	1x PCIe X16 V3 1x PCIe X4 V3		
M.2 Slot	M.2-2280 slot SATA and PCIe V2 X4	M.2-2280 slot SATA and PCIe V3 X4 (NVMe support)		
Slot for WLAN	M.2 2230 AE	Mini-PCIe, Half-Size		M.2 2230 AE
Gigabit LAN	Intel i219LM	Intel i218LM		Intel i211 und i219LM
Audio	2 ch Realtek ALC662	7.1 channel, Realtek ALC892		
USB	4x USB 3.0 4x USB 2.0	8x USB 3.0 2x USB 2.0	8x USB 3.0	
SATA Ports	3x SATA 6G	4x SATA 6G 1x eSATA 6G		4x SATA 6G
Power Supply	300W [A]	300W [A] Plus: 500W [B]	500W [B]	
Front Face	R4 chassis customizable	R6 chassis Plastic front	R8 chassis Brushed Alu	
Optional Accessories	PHD3: 3.5"/2.5" adapter H-RS232: COM port WLN-M: WLAN PC63J: 500W PSU	PHD3: 3.5"/2.5" adapter H-RS232: COM port WLN-C / WLN-P: WLAN PC63J: 500W PSU	PHD3: 3.5"/2.5" adapter H-RS232: COM port WLN-C / WLN-P: WLAN	PHD3: 3.5"/2.5" adapter H-RS232: COM port WLN-M: WLAN
Front Panel				
Rear Panel				

Power Supply A: 300W - 80+ Bronze, with 6-pin power connector for the graphics card

Power Supply B: 500W - 80+ Silver, with 6-pin and 8-pin power connector for the graphics card

6th Generation Intel Core Desktop Processor Family

Socket LGA1151 14 nm "Skylake-S" processor overview (Date: September 2015)

Name	Model	Cores/ Threads	CPU Clock	Turbo Clock	Cache	TDP	Graphics Engine	Graphics Clock
Core i7	6700K	4 / 8	4.0 GHz	4.2 GHz	8 MB	91 W	HD 530	350~1150 MHz
	6700	4 / 8	3.4 GHz	4.0 GHz	8 MB	65 W	HD 530	350~1150 MHz
	6700T	4 / 8	2.8 GHz	3.6 GHz	8 MB	35 W	HD 530	350~1100 MHz
Core i5	6600K	4 / 4	3.5 GHz	3.9 GHz	6 MB	91 W	HD 530	350~1150 MHz
	6600	4 / 4	3.3 GHz	3.9 GHz	6 MB	65 W	HD 530	350~1150 MHz
	6600T	4 / 4	2.7 GHz	3.5 GHz	6 MB	35 W	HD 530	350~1100 MHz
	6500	4 / 4	3.2 GHz	3.6 GHz	6 MB	65 W	HD 530	350~1150 MHz
	6500T	4 / 4	2.5 GHz	3.1 GHz	6 MB	35 W	HD 530	350~1100 MHz
	6400	4 / 4	2.7 GHz	3.3 GHz	6 MB	65 W	HD 530	350~1150 MHz
	6400T	4 / 4	2.2 GHz	2.8 GHz	6 MB	35 W	HD 530	350~1100 MHz
Core i3	6320	2 / 4	3.9 GHz	–	4 MB	65 W	HD 530	350~1150 MHz
	6300	2 / 4	3.8 GHz	–	4 MB	65 W	HD 530	350~1150 MHz
	6300T	2 / 4	3.3 GHz	–	4 MB	35 W	HD 530	350~1100 MHz
	6100	2 / 4	3.7 GHz	–	4 MB	65 W	HD 530	350~1150 MHz
	6100T	2 / 4	3.2 GHz	–	4 MB	35 W	HD 530	350~1100 MHz
Pentium	G4520	2 / 2	3.6 GHz	–	3 MB	51 W	HD 530	350~1150 MHz
	G4500	2 / 2	3.5 GHz	–	3 MB	51 W	HD 530	350~1150 MHz
	G4500T	2 / 2	3.0 GHz	–	3 MB	35 W	HD 530	350~1100 MHz
	G4400	2 / 2	3.3 GHz	–	3 MB	51 W	HD 530	350~1150 MHz
	G4400T	2 / 2	2.9 GHz	–	3 MB	35 W	HD 530	350~1100 MHz
Celeron	G3920	2 / 2	2.9 GHz	–	2 MB	51 W	HD 530	350~1050 MHz
	G3900	2 / 2	2.8 GHz	–	2 MB	51 W	HD 530	350~1050 MHz
	G3900T	2 / 2	2.6 GHz	–	2 MB	35 W	HD 530	350~950 MHz

K = unlocked, T = Power optimized lifestyle, HT = Hyper Threading (SMT).

Note: The Shuttle XPC cube Barebone SH110R4 does not support the unlock-function of Intel K-Series processors.
Please refer to the support list for detailed processor support information at global.shuttle.com.

7th Generation Intel Core Desktop Processor Family

Socket LGA1151 14nm "Kaby Lake-S" processor overview (Date: January 2017)

Name	Model	Cores/ Threads	CPU Clock	Turbo Clock	Cache	TDP	Graphics Engine	Graphics Clock
Core i7	7700K	4 / 8	4.2 GHz	4.5 GHz	8 MB	91 W	HD 630	350~1150 MHz
	7700	4 / 8	3.6 GHz	4.2 GHz	8 MB	65 W	HD 630	350~1150 MHz
	7700T	4 / 8	2.9 GHz	3.8 GHz	8 MB	35 W	HD 630	350~1150 MHz
Core i5	7600K	4 / 4	3.8 GHz	4.2 GHz	6 MB	91 W	HD 630	350~1150 MHz
	7600	4 / 4	3.5 GHz	4.1 GHz	6 MB	65 W	HD 630	350~1150 MHz
	7600T	4 / 4	2.8 GHz	3.7 GHz	6 MB	35 W	HD 630	350~1100 MHz
	7500	4 / 4	3.4 GHz	3.8 GHz	6 MB	65 W	HD 630	350~1100 MHz
	7500T	4 / 4	2.7 GHz	3.3 GHz	6 MB	35 W	HD 630	350~1100 MHz
	7400	4 / 4	3.0 GHz	3.5 GHz	6 MB	65 W	HD 630	350~1000 MHz
	7400T	4 / 4	2.4 GHz	3.0 GHz	6 MB	35 W	HD 630	350~1000 MHz
Core i3	7350K	2 / 4	4.2 GHz	–	4 MB	60 W	HD 630	350~1050 MHz
	7320	2 / 4	4.1 GHz	–	4 MB	51 W	HD 630	350~1050 MHz
	7300	2 / 4	4.0 GHz	–	4 MB	51 W	HD 630	350~1050 MHz
	7300T	2 / 4	3.5 GHz	–	4 MB	35 W	HD 630	350~1100 MHz
	7101E	2 / 4	3.9 GHz	–	3 MB	54 W	HD 610	350~1100 MHz
	7101TE	2 / 4	3.4 GHz	–	3 MB	35 W	HD 610	350~1100 MHz
	7100	2 / 4	3.9 GHz	–	3 MB	51 W	HD 630	350~1100 MHz
	7100T	2 / 4	3.4 GHz	–	3 MB	35 W	HD 630	350~1100 MHz
Pentium	G4620	2 / 4	3.7 GHz	–	3 MB	51 W	HD 630	350~1100 MHz
	G4600	2 / 4	3.6 GHz	–	3 MB	51 W	HD 630	350~1100 MHz
	G4600T	2 / 4	3.0 GHz	–	3 MB	35 W	HD 630	350~1050 MHz
	G4560	2 / 4	3.5 GHz	–	3 MB	54 W	HD 610	350~1050 MHz
	G4560T	2 / 4	2.9 GHz	–	3 MB	35 W	HD 610	350~1050 MHz
Celeron	G3950	2 / 2	3.0 GHz	–	2 MB	51 W	HD 610	350~1050 MHz
	G3930	2 / 2	2.9 GHz	–	2 MB	51 W	HD 610	350~1050 MHz
	G3930T	2 / 2	2.7 GHz	–	2 MB	35 W	HD 610	350~1000 MHz

K = unlocked, T = Power optimized lifestyle, HT = Hyper Threading (SMT).

Note: The Shuttle XPC cube Barebone SH110R4 does not support the unlock-function of Intel K-Series processors.
Please refer to the support list for detailed processor support information at global.shuttle.com.